

Snemalec dvokraki, drsni

683/2



Uporaba



Profili



[\(/slo/about-us/materials\)](https://slo/about-us/materials)



[\(/slo/about-](https://slo/about-us/materials)

[us/materials\)](https://slo/about-us/materials)




[_\(/slo/support/warranty\).](https://slo/support/warranty)

Atributi izdelka

- material: Premium Flex Plus ogljikovo jeklo
- kovan, v celoti poboljšan
- površinska zaščita: kromiran po ISO 1456:2009, vijak črnjen
- pri uporabi se kraki tesno stisnejo pod delom, ki ga snemamo

Prednosti:

- z obračanje krakov lahko snemalec uporabljamo za notranje in zunanje snemanje

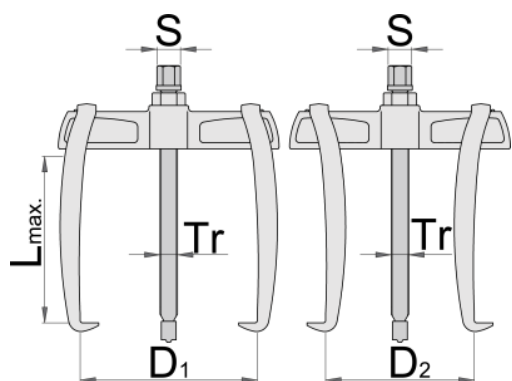

	Nº	L↑	D1	D2			M	S	
615076	60	90	65	50 - 90	25	2.5	M 10x1	14	325
615077	90	90	90	50 - 110	25	2.5	Tr 10x1.5	14	395
615078	130	140	130	80 - 140	50	5	Tr 14x2	17	1125
615079	180	140	180	80 - 180	50	5	Tr 14x2	17	1225
615080	250	195	250	130 - 250	75	7.5	Tr 26x3	32	4025
615081	350	195	350	130 - 350	75	7.5	Tr 26x3	32	4525

Maloprodajno pakiranje

	MA	MB	MC	
615076	85	160	30	395
615077	85	160	30	465
615078	75	240	55	1195
615079	75	240	55	1295
615080	100	350	80	4095
615081	130	440	80	4595

Transportno pakiranje

		TA	TB	TC	
615076	1	85	170	28	395
615077	1	85	170	28	465
615078	1	80	245	60	1195
615079	1	75	250	53	1295
615080	1	105	378	80	4095
615081	1	133	460	80	4595

Rezervni deli



Ročica snemalna



Vreteno